

info@averlite.com www.averlite.com


FEATURES

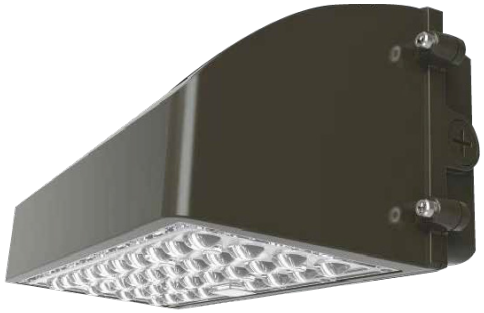

- Moisture and dust resistant
- Smooth and uniform light output void of flicker or humming noise
- Sleek and modern aesthetics combined with a rugged construction
- Resistant to vibration and water
- Inputs voltage range : 100 -277 V, 50-60Hz
- Made from prime grade aluminum alloy

PHYSICAL PARAMETERS

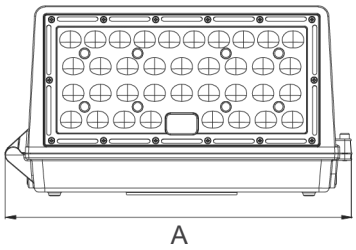



Wattage	A (in)	B (in)	C (in)
48 W - 100 W	12.6	5.1	6.8

DESCRIPTION

The Averlite LED wall pack full cutoff is the best in its class for power efficiency when it comes to light fixtures for wall-mounted security and building facades. It offers reduced energy consumption and eliminates the need for frequent bulb and ballast replacements which are common with conventional Wall Packs that contain Metal Halide and High Pressure Sodium bulbs. It is designed to replace the traditional Wall Packs up to 1000W HID.

Averlite reserves the right to discontinue products or to change the technical and/or design specifications at any time.

ORDERING INFORMATION

SERIES CODE


Model Number	Wattage	CCT Optional	CRI	Efficacy	Lens Type
AV-FCWP-048-30L73WP	48 W	2700 K - 5700 K	70+	120 lm/W	
AV-FCWP-060-50L73WP	60 W	2700 K - 5700 K	70+	120 lm/W	Polycarbonate
AV-FCWP-080-50L73WP	80 W	2700 K - 5700 K	70+	120 lm/W	Type 2, 3, 4, 5
AV-FCWP-100-50L73WP	100 W	2700 K - 5700 K	70+	120 lm/W	

FIXTURE DETAILS

Efficacy	120 lm/W			
Wattage	48 W	60 W	80 W	100 W
Lumen Output	5760 lm	7200 lm	9600 lm	12000 lm
LED Brand and Package	LUMILED / CREE 3030, 1W			
Number of LEDs	56	72	108	144
Operating Temperature	-20°F to +140°F			
IP Rating	IP65			
Power Factor	> 0.95			
Heat Sink Type	High Pressure Die Cast Aluminum			
PCB Thickness	1.2mm			


MOUNTING OPTIONS

A. WALL MOUNT

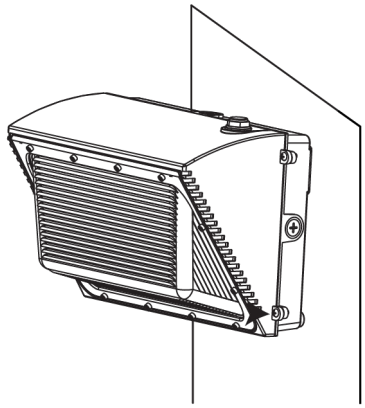


DISTRIBUTION DIAGRAM


48 W

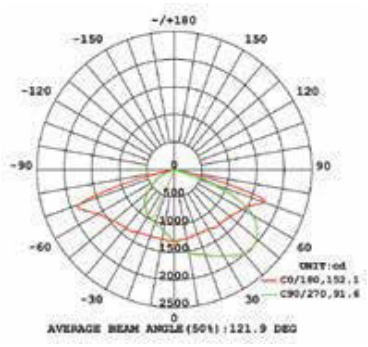

60 W

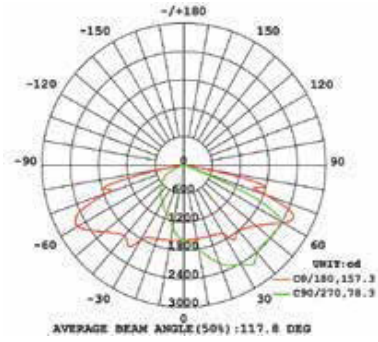

80 W

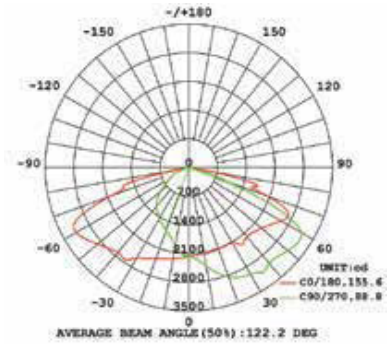

INSTALLATION

A. WALL MOUNT

1. Unscrew the screw to remove the lamp body (Figure 1)
2. Unscrew the cover of the entry hole and remove it. (Figure 2)
3. Connect input and dimming wires with wires from j-box. (Figure3)
4. Use the screws to lock the fixture. (Figure 4)




Figure 1




Figure 2




Figure 3




Figure 4